

LBS-3232



HDBaseT, Optical, HDMI, DVI

Link Bridge™ Universal Multi-format Matrix Switch



Switcher Front

FEATURES

- Professional Video Switched Distribution with Multiformat Modular Platform
- HDMI/DVI Centric Video Switching
- HDBaseT Output Switching for Distance HDMI/DVI (Up to 100m w/ PoH)
- Optical I/O Switching for Long Distance HDMI/DVI (Up to 400m)
- Supports True DDC/EDID/HDCP Transmission
- Up to 32 Input and Output Ports with 8 or 4 Ports per I/O Card
- Support Resolutions up to 1080p and 1920x1200@60Hz, or up to UltraHD (4K/30 Hz)
- Remote Control: Supports RS-232 Control, Ethernet Web GUI, and Telnet Control.
- HDBaseT and Optical I/O cards support In-Line-Control with compatible Transmitters and Receivers
- Supports Redundant Power Supply
- Compatible with LBO Series Optical Extenders and with the Standard and Designer Series (LBC & LBH model) HDBaseT Extenders

MATRIX SWITCH

Array Size	Up to 32x32 (configurable by multiple of 8)
EDID Control	Built-in Internal Standard EDID & Programmable EDID

HDMI/ DVI PORTS*

Signal	Single Link DVI 1.1, HDMI 1.3
Resolution	Up to 1080p or 1920x1200@60Hz, or up to (4K/30 Hz)
Connector	DVI or HDMI Female Plugs
Protocol	EDID/DDC and HDCP Capable

*The input ports of the LBS are fully compatible with our LBO/LBC/LBH Series products in DVI, HDMI, VGA, YPbPr, S-Video, SD-SDI, HD-SDI, 3G-SDI

FIBER/ HDBaseT PORTS

Fiber/HDBaseT Type	Multimode 50um or 62.5um/ CAT5e/6
Connector	SC/ RJ45
Protocol	EDID/DDC and HDCP Ccapable

PHYSICAL




Dimensions (HxWxD)	8.70" x 19.0" x 12" Including chassis handle
--------------------	--

ORDERING INFORMATION

LBS-8IN-OPT	8-Input Card, Optical (Video Only)
LBS-8OUT-OPT	8-Output Card, Optical (Video Only)
LBS-8IN-OPT-VP	8-Input Card, Optical (AD Compatibility)
LBS-8OUT-OPT-VP	8-Output Card, Optical (AD Compatibility)
LBS-8IN-OPT-ILCE	8-Input Card, Optical with Ethernet In-Line Control (AD Compatibility)
LBS-8OUT-OPT-ILCE	8-Output Card, Optical with Ethernet In-Line Control (AD Compatibility)
LBS-8IN-OPT-ILC2	8-Input Card, Optical with RS232 In-Line Control (AD Compatibility)
LBS-8OUT-OPT-ILC2	8-Output Card, Optical with RS232 In-Line Control (AD Compatibility)
LBS-8IN-HDBT-E	8-Input Card, HDBaseT with Ethernet
LBS-8OUT-HDBT-E	8-Output Card, HDBaseT with Ethernet
LBS-8IN-DVI	8-Input Card, DVI
LBS-8OUT-DVI	8-Output Card, DVI
LBS-8IN-HDMI-4K3	8-Input Card, HDMI, 4K/30Hz
LBS-8OUT-HDMI-4K3	8-Output Card, HDMI, 4K/30Hz
LBS-8IN-HDMI	8-Input Card, HDMI, 1080P & WUXGA
LBS-8OUT-HDMI	8-Output Card, HDMI, 1080P & WUXGA
LBS-8IN-VGA	8-Input Card, VGA

Replace -8IN or -8OUT with -4IN or -4OUT for 4-Port Card

DIMENSIONS

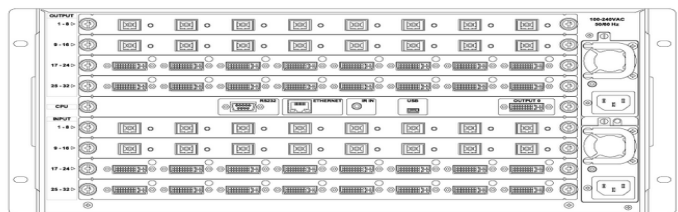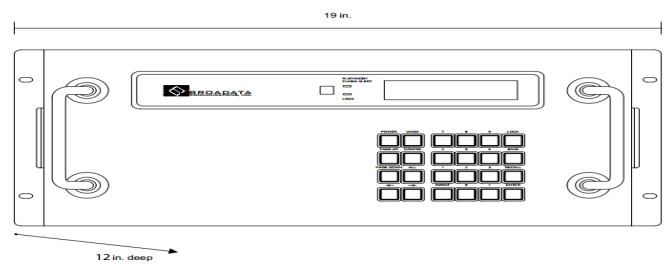

DOING MORE WITH ONE CABLE

