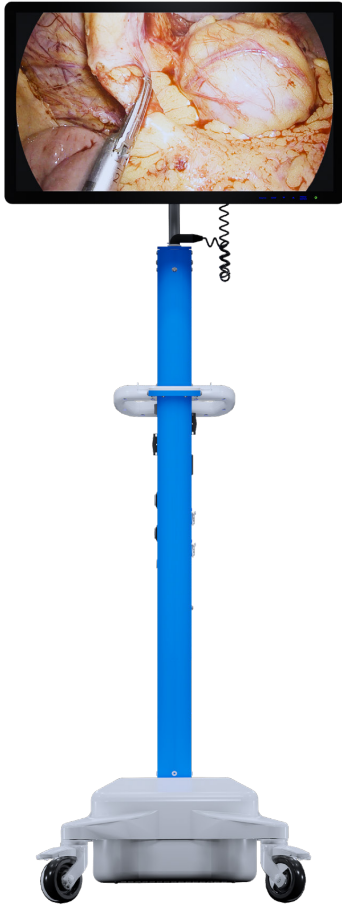
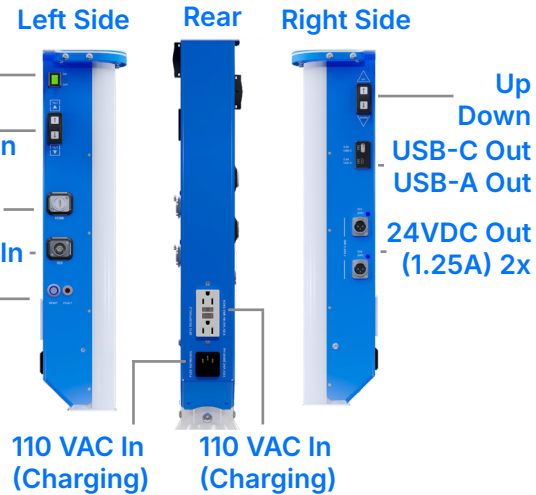
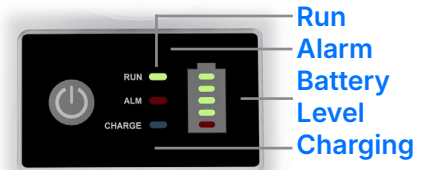


Battery Powered Mobile Stand


Top


Overview

Introducing the revolutionary battery-powered fully wireless video solution for commercial and medical applications. With up to 8 hours of battery life and full freedom of movement, this wireless monitor stand includes connections for power outputs of 12 and 24 volts.

FEATURES

- Cordless battery powered monitor stand specifically designed and certified for medical use
- Use with 4K wireless video system (sold separately) for a completely cordless secondary monitor solution
- Rechargeable 1920 Wh lithium-ion battery lasts up to 8 hours (32" monitor) and rapidly recharges in 4 hours
- Push button, powered controls for monitor height and tilt adjustments
- HDMI and 12G-SDI pass through connections to the monitor, allows easy connection of a wired signal
- Integrated power inverter and 110 VAC GFCI power outlets for powering AC input devices
- 24 and 12 VDC connections for powering both the monitor and wireless receiver/plies

GENERAL FEATURES

Monitor Height Adjustment	Powered, push-button controls
Height Adjustment Range	60 Inches (Lowest), 73 Inches (Highest)
Monitor Tilt Adjustment	Powered, push-button controls
Tilt Adjustment Range	+ 20 Degrees (Up), - 5 Degrees (Down)
Low Battery Warning	Visual indicator and audible alarm
Optional Attachments	Rear handle, compact tray

ELECTRICAL SPECIFICATIONS

Battery Type	24VDC, Rechargeable Lithium-Ion
Battery Capacity	50 to 75 Amp hours (1280 to 1920 Watt hours)
Power Input (Charging)	100 VAC, 4 Amps, 50/60 Hz
Typical Run Time	8 Hours when powering 32" monitor
Analog Audio	2 Vrms, 50kOhm, unbalanced
Typical Charge Time	4 Hours

POWER OUTPUTS

Power Outputs	AMPS (MAX)	Devices Supported
24 VDC x1	8 Amps	Monitors, up to 32"
12 VDC x1	3 Amps	Wireless Video Receiver
110 VAC x2	6 Amps each	Any AC powered accessory
24 VDC x2	1.25 Amps	Any 24V powered accessory
USB-A	2.4 Amps	For Charging USB devices
USB-C	3 Amps	For charging USB-C devices

VIDEO PASS-THROUGH CONNECTIONS

Video Inputs	Connector	Max Resolution
12G-SDI x 1	BNC	4K
HDMI 2.0 x 1	HDMI	4K

PHYSICAL

Dimensions	20 × 59 × 24 in (508 × 1498.6 × 609.6 mm)
Stand Weight	150 lbs (68 kg)
Caster Wheel Size	10 In (254 mm), locking type
Monitor Mounting Pattern	100 × 100 mm & 75 × 75 mm VESA
Maximum Monitor Weight	50 lbs (22.7 kg)
Cable Management	Cable cover included
Operating Temperature	TBD (0C)
Storage Temperature	TBD (0C)
Operating Humidity	TBD RH (Non-condensing)
Storage Humidity	TBD RH (Non-condensing)
Operating Altitude	TBD meters

ORDER INFORMATION

20032S	Battery Powered Mobile Stand
--------	------------------------------

PANEL DRAWING

